




## **MARINE COMMON RAIL ENGINES**

# **4LV** Series

150-250 mhp

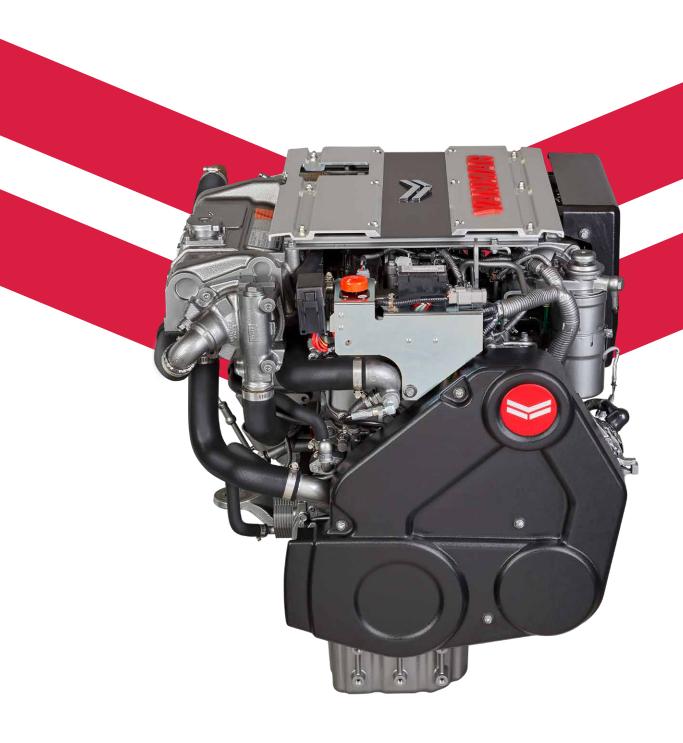



Featuring the latest engine technologies, the 4LV Series is undoubtedly cleaner, quieter, and produces more torque & acceleration than any other engine in its class. The 4LV is the ideal solution for sailing yachts over 50 ft, super yacht tenders, small motorboats and light duty commercial vessels.

The 4LV proves to be an extremely efficient engine without any compromise on quality. Featuring the newest system in common-rail technology, the mid-range engines deliver maximum performance and reliability, while maintaining minimal fuel consumption and exceptionally low noise & emission levels. By exceeding the strict EPA Tier 3 and EU RCD Stage 2 emission regulations, the engines feature virtually smoke and odor free operation.

Equally, the 4LV doesn't disappoint in performance. The 2.8 L displacement delivers a powerful low-end torque performance. This results in a stunning acceleration and really sets these engines apart from others in their power range.

To ensure support of advancing marine technologies, direct connectivity to NMEA and J1939 CAN-bus networks has been purpose engineered into the 4LV range, allowing future-proofed integration to any multifunction bridge display.

Over and above the impressive performance, the resounding benefit of the 4LV Series remains its versatility. Fulfilling needs across all boating applications, the 4LV is the perfect solution for new builds and repowering. It is compact and easily fits into previous model footprints. An ideal installation for sailboats, motor boats, or light commercial vessels, the 4LV range will be complemented by a choice of YANMAR's expanding controls, including the VC10 electronic control panel, providing real time diagnostics, and the JC20 joystick system, providing innovative maneuvering solutions.



CLEAN

INTERCONNECT



# Features:

- Specifically designed for sailing yachts over 50 ft, super yacht tenders, small motor boats and light duty commercial vessels
- Powerful low-end torque performance, delivering superior acceleration
- Exceeds EPA Tier 3 & RCD Stage 2 emmissions regulations
- Measures significantly low in smoke, odor, & noise
- Direct connectivity for plug & play integration



QUIET


**POWERFUL** 


**FUEL EFFICIENT** 

#### **MAXIMUM OUTPUT AT CRANKSHAFT**

| MODEL  | RATED POWER @SPEED                 |  |
|--------|------------------------------------|--|
|        |                                    |  |
| 4LV150 | 150 mhp / 110 kW @3500 rpm         |  |
|        |                                    |  |
| 4LV170 | 170 mhp / 125 kW <b>@</b> 3500 rpm |  |
|        |                                    |  |
| 4LV195 | 195 mhp / 143 kW @3500 rpm         |  |
| 4LV175 | 175 Hillp / 145 kW @5500 TpHI      |  |
|        |                                    |  |
| 4LV230 | 230 mhp / 169 kW @3800 rpm         |  |
|        | · ·                                |  |
| 4LV250 | 250 mhp / 183 kW @3800 rpm         |  |
| 4LV2JU | ZJU IIIIIP / TOJ KW WJOUU I PIII   |  |

#### **DIMENSIONS**





#### **SPECIFICATIONS**

| DISPLACEMENT  | 2.755 L   | [168 cu in]            |  |
|---|---|------------------------|--|
| BORE X STROKE   | 92 mm X 103.6 mm  | [3.6 in x 4 in]        |  |
| CYLINDERS   | 4 IN-LINE   |                        |  |
| COMBUSTION SYSTEM                                     | DIRECT INJECTION WITH DENSO COMMON RAIL SYSTEM  |                        |  |
| LOW IDLE RPM  | <b>700</b> rpm  |                        |  |
| ASPIRATION  | TURBOCHARGER WITH CHARGE-AIR COOLER   |                        |  |
| STARTING SYTEM  | ELECTRIC STARTING 12V – 2 KW  |                        |  |
| ALTERNATOR  | DENSO 12V - 130A  |                        |  |
| COOLING SYSTEM  | FRESH WATER COOLING BY CENTRIFUGAL FRESH<br>WATER PUMP<br>SEA WATER COOLING BY RUBBER IMPELLER<br>SEAWATER PUMP |                        |  |
| LUBRICATION SYSTEM                                    | ENCLOSED, FORCED LUBRICATING SYSTEM   |                        |  |
| DIRECTION OF ROTATION [CRANKSHAFT]                    | COUNTERCLOCKWISE VIEWED FROM STERN  |                        |  |
| DRY WEIGHT WITHOUT GEAR* WEIGHT INCLUDING KMH50A GEAR | 332 kg<br>384 kg  | [732 lbs]<br>[846 lbs] |  |
| EMISSION COMPLIANCE                                   | EU: RCD 2, BSO II, EMC  | US: EPA TIER 3         |  |
| ENGINE MOUNTING                                       | RUBBER TYPE FLEXIBLE MOUNTING   |                        |  |
| OPTIONS**   | VC10 CONTROL SYSTEM, JC20 JOYSTICK SYSTEM,<br>2ND ALTERNATOR, SEMI 2-POLE                                       |                        |  |

<sup>\*</sup> Including damper disk.



### **CLEAN**

Surpassing strict global emission standards for virtually odor and smoke free operation.

### INTERCONNECTIVE

Uniquely engineered to integrate with the latest electronic components and multi-function displays for advanced engine monitoring and control.

### QUIET

Harnessing cutting-edge technology to create extremely low vibration and noise levels.

### **POWERFUL**

Offering exceptionally responsive performance and control due to superior torque levels.

### **FUEL EFFICIENT**

Minimizing consumption and optimizing performance with precise, digitally-controlled fuel injection.



<sup>\*\*</sup>For a full list of controls and options, please see the detailed 4LV Datasheet.